


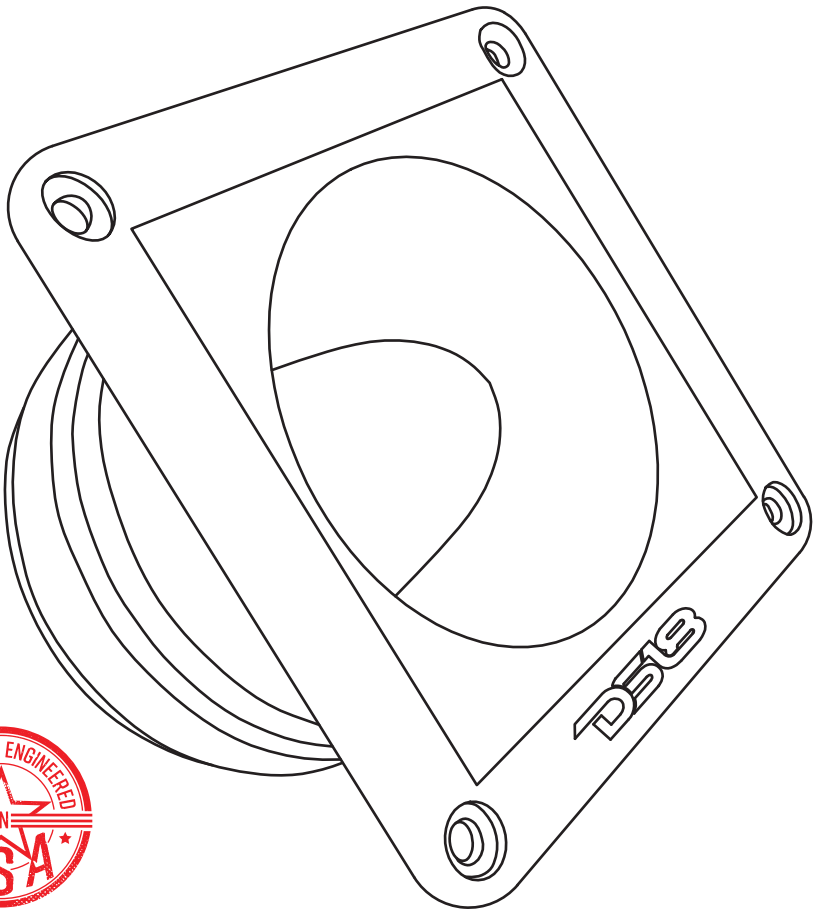



DS18[®]
PRO

OWNER'S MANUAL
PRO-TWX6
1.5" VC ALUMINUM SUPER
BULLET TWEETER

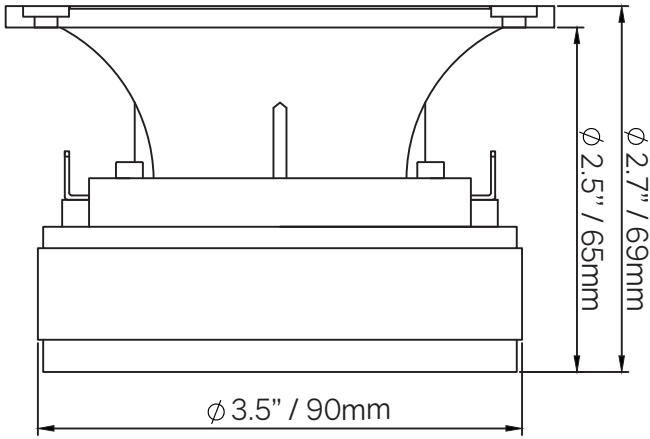

PRO-TWX6

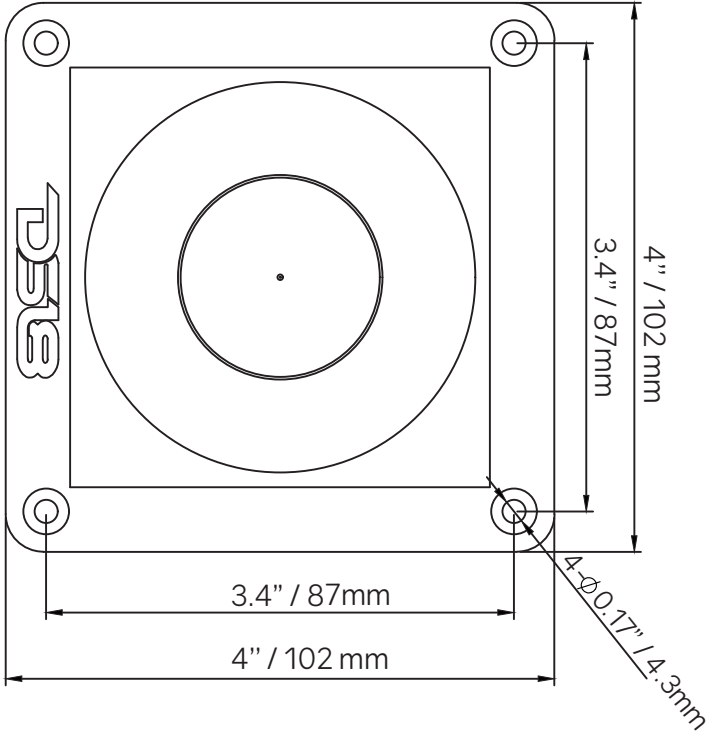

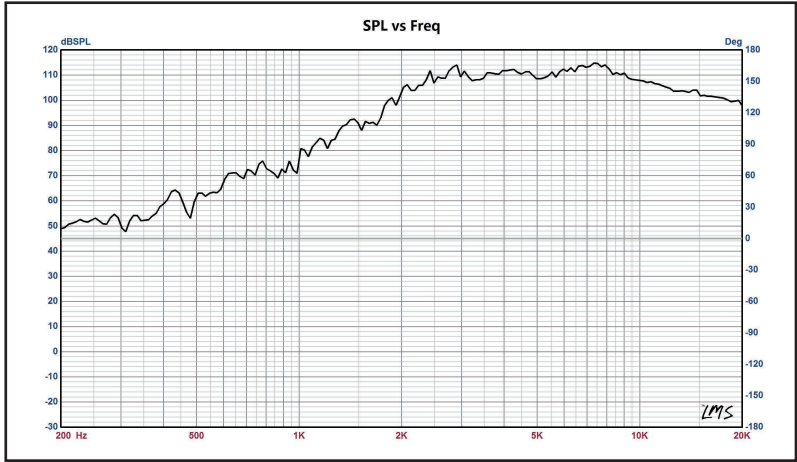

Specifications:

Nominal Diameter	4"x4" / 102x102mm
Nominal Impedance	8 ohms
Peak Power	480 watts
Program Power	240 watts
AES Power	120 watts
Sensitivity (1w/1m)	112 db
Frequency Response	1.7Hz- 20KHz
Recommended Hi Pass Crossover	2.5hz

Motor:

Voice Coil Diameter	1.5" / 38mm
Voice Coil Former Material	KSV
Winding Material	SN
Diaphragm Material	Titanium
Body Material	Aluminum
Magnet Material	Ferrite
Magnet Weight	15 oz

Measurements:

Overall Diameter	4"x4" / 102x102mm
Front Mount Baffle Cutout	3.5" / 90mm
Overall Depth	2.7" / 69mm
Mounting Depth	2.5" / 65mm
Motor Diameter	3.5" / 90mm



FOR MORE INFORMATION
PLEASE VISIT
DS18.COM

WE LIKE IT LOUD

The DS18 logo, featuring the letters "DS18" in a bold, italicized, sans-serif font. A registered trademark symbol (®) is located to the upper right of the "8".

DS18[®]