



DS18[®]

PRO




OWNER'S MANUAL
PRO-W10.4S
10" WOOFER
LOUDSPEAKER
WATER RESISTANT CONE



PERFECT FOR
MOTORCYCLES



PRO-W10.4S

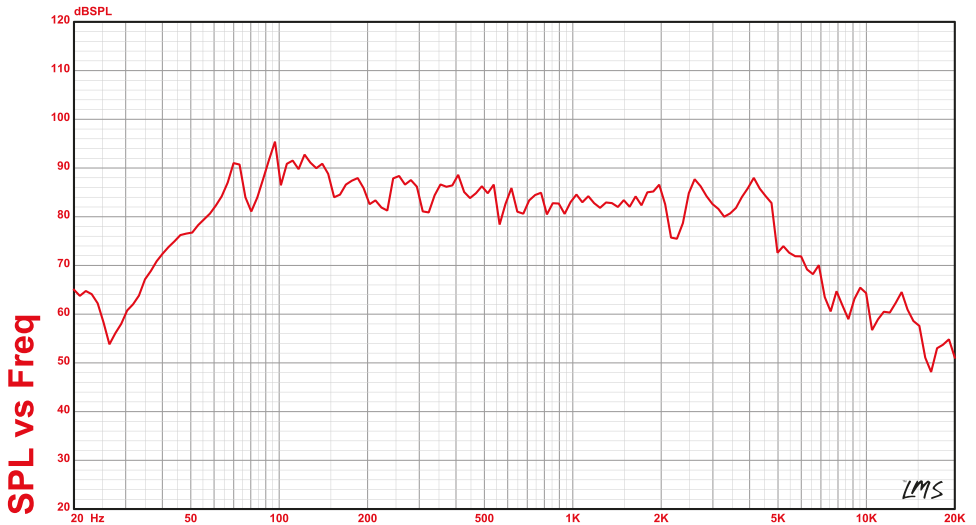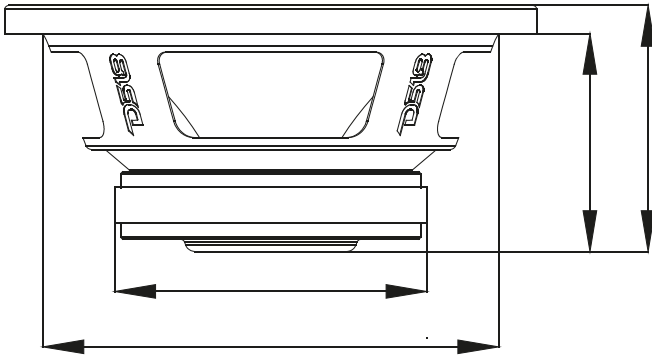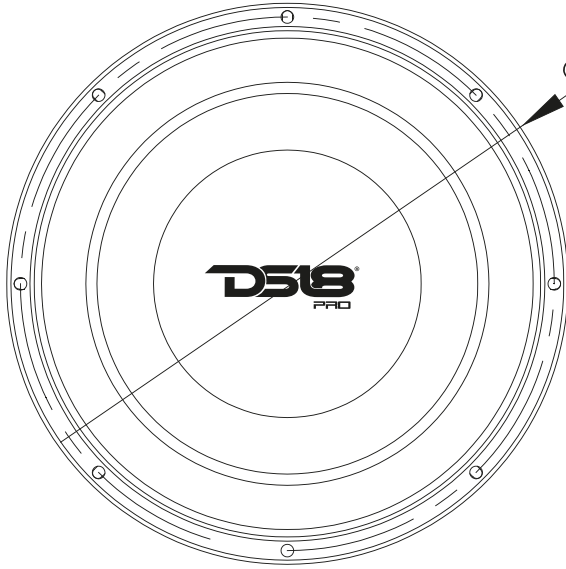



Specifications:

| | |
|-------------------------------|-----------------------|
| Nominal Diameter | 10" (254mm) |
| | 4 ohms svc |
| Nominal Impedance | 700 watts |
| | 350 watts |
| Maximum Power Handling | 88 db |
| | 40Hz - 4.5KHz |
| RMS Power Handling | 180hz |
| | |
| Sensitivity (1w/1m) | |
| | 2.5" (65.5mm) |
| Frequency Response | Til |
| | SV |
| Recommended Lo Pass Crossover | Water resistant paper |
| | Water resistant paper |
| | Rubber |

Motor:

| | |
|----------------------------|-----------------|
| Voice Coil Diameter | Steel |
| | Ferrite |
| Voice Coil Former Material | 46 oz |
| | 2.12L |
| Winding Material | |
| | Vas 19.654 LTR |
| Cone Material | Xmax 12.2 mm |
| | Fs 40 Hz |
| | Qms 4.275 |
| Dust Cap Material | Qes 0.561 |
| | Qts 0.492 |
| Surround Material | Mms 67.313g |
| | Cms 0.23mm/N |
| Basket Material | Bl 9.801 |
| | Le 1.165mH |
| Magnet Material | Sd 0.035299sq/m |
| | Re 3.2 ohms |
| Magnet Weight | EBP 77.2 |
| | |

| | |
|---------------------------------------|-----------------|
| Displacement Volume | |
| | 264 mm (10.39") |
| | 128 mm (5.04") |
| Thiele & Small Parameters: | 231 mm (9.09") |
| Equivalent | 114 mm (4.49") |
| Volume..... | 156 mm (6.14") |
| Excursion (one | |

PRC-W10.4S



FOR MORE INFORMATION
PLEASE VISIT
DS18.COM

WE LIKE IT LOUD

The DS18 logo, featuring the letters "DS18" in a bold, italicized, sans-serif font. A registered trademark symbol (®) is located to the upper right of the "8".

DS18[®]