







D518[®]
PRO

OWNER'S MANUAL
PRO-X6.4.13MRGB
6.5" MIDRANGE LOUDSPEAKER
WITH RGB LED BULLET

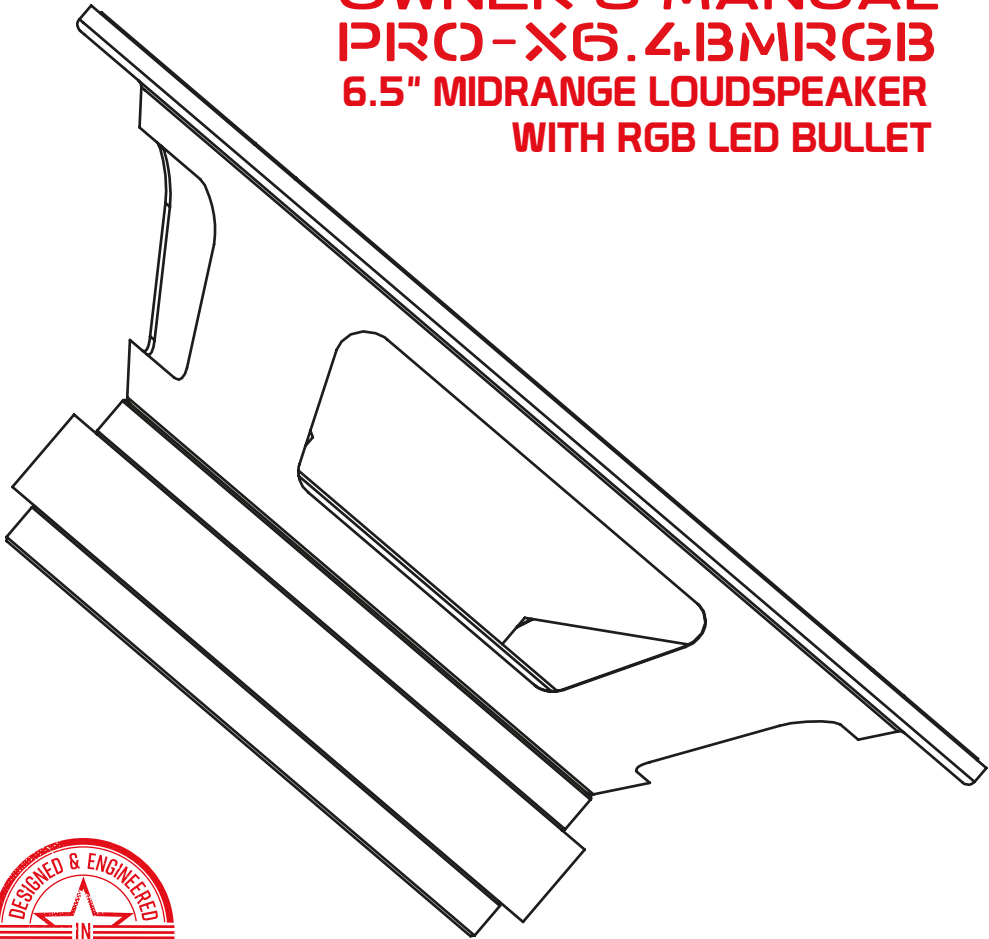

PRO-X6.4BMRGB

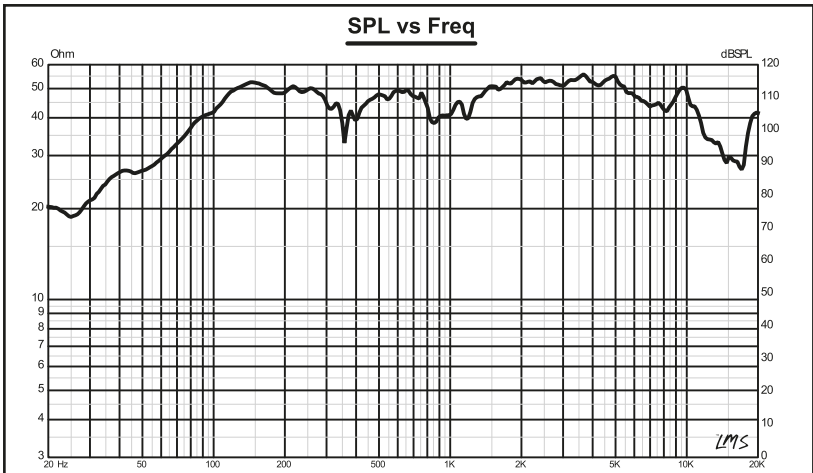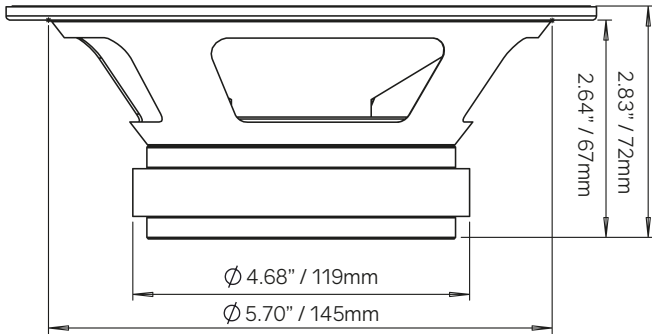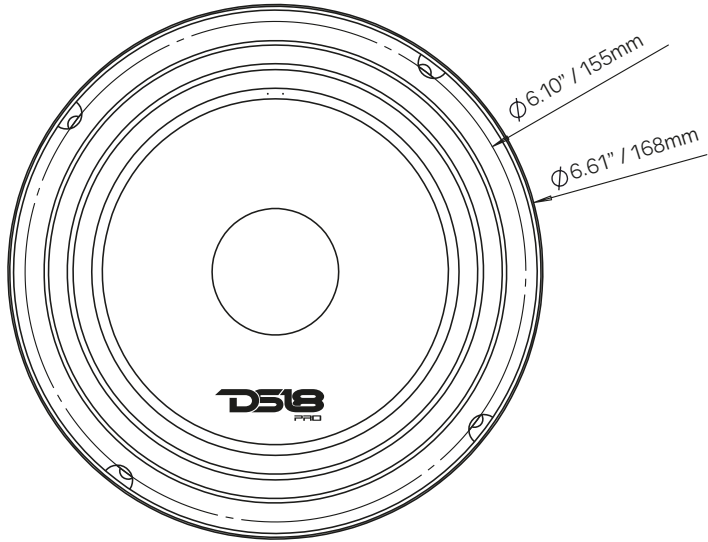

Specifications

Nominal Diameter	6.5"
.....	4 ohm
Nominal Impedance	250w
.....	500w
RMS Power Handling	94dB
.....	125Hz-12KHz
MAX Power Handling	135 Hz
.....	
Sensitivity (1w/1m)	38.6mm / 1.5"
.....	
Frequency	Kapton
Re-	CCAW
sponse.....	Paper
..	Translucid ABS
Recommended HI Pass Cross-	with RGB LED
over.....	Cloth
	Steel
	Ferrite

Motor

Voice Coil Diame-	30 Oz
ter.....	0.032L

Voice Coil Former Material

.....	
Winding Material	Vas.....2.349L
.....	8.2mm

	Xmax.....135Hz
--	----------------

Cone Materi-7.707
al.....	Fs.....0.789
.....0.716

Bullet Materi-10.718g
al.....	Qms.....0.094 m/N
.....6.689

4.22mH
--	-------------

Surround Materi-	Qes.....132.73 mm2
al.....3.2 ohms

..	
Basket Material6.61" / 168mm

.....	2.83" / 72mm
-------	--------------

Magnet Materi-	5.70" / 145mm
al.....	2.64" / 67mm

.....	4.68" / 119mm
-------	---------------

PRO-X6.4BMRGB

#WELIKEITLOUD





FOR MORE INFORMATION
PLEASE VISIT
DS18.COM

WE LIKE IT LOUD

DS18[®]

The DS18 logo is rendered in a bold, red, stylized font. Above the logo is a thick red horizontal swoosh that curves upwards on the left side and then levels off to the right.